
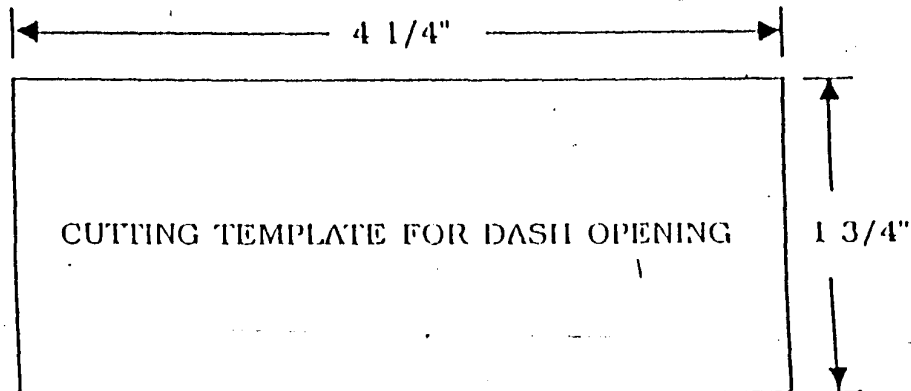



BILLET CONTROL PANEL INSTALLATION INSTRUCTIONS

1. Cut opening in dash per template size.
2. Wire the control panel according to your application.
3. Insert aluminum front panel into dash.
4. Install switch mounting plate to front aluminum panel using the 10/32 screws. This will hold front panel secure in dash.
5. Operation of controls:
 - A. Top left switch is for fan speed
 - * LO, MEDIUM AND HIGH
 - B. Top right lever is thermostat for A/C
 - C. Bottom right lever is mode select
 - * ECONOMY
 - * A/C
 - * HEATER
 - * DEFROST

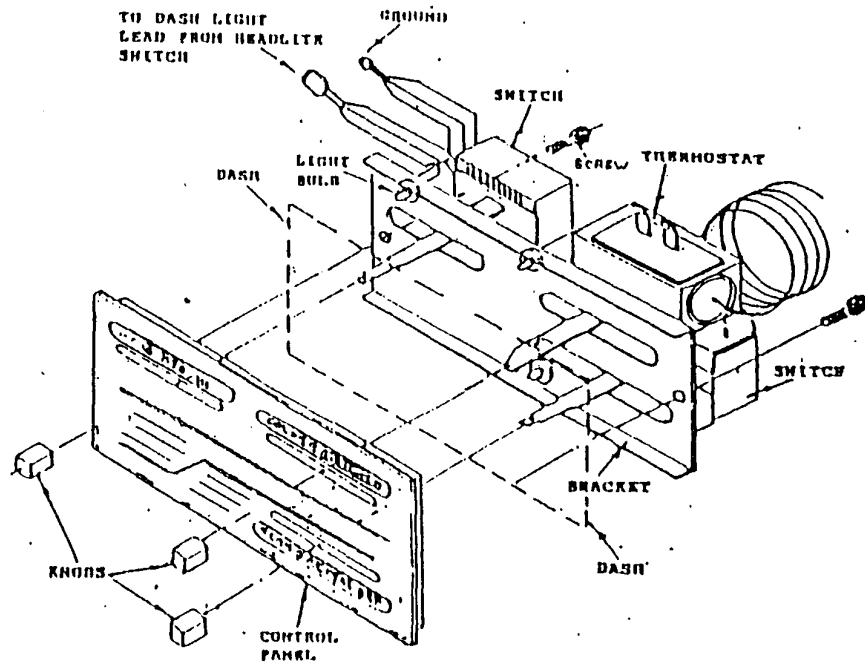

BILLET SLIDE

BULLET CONTROL

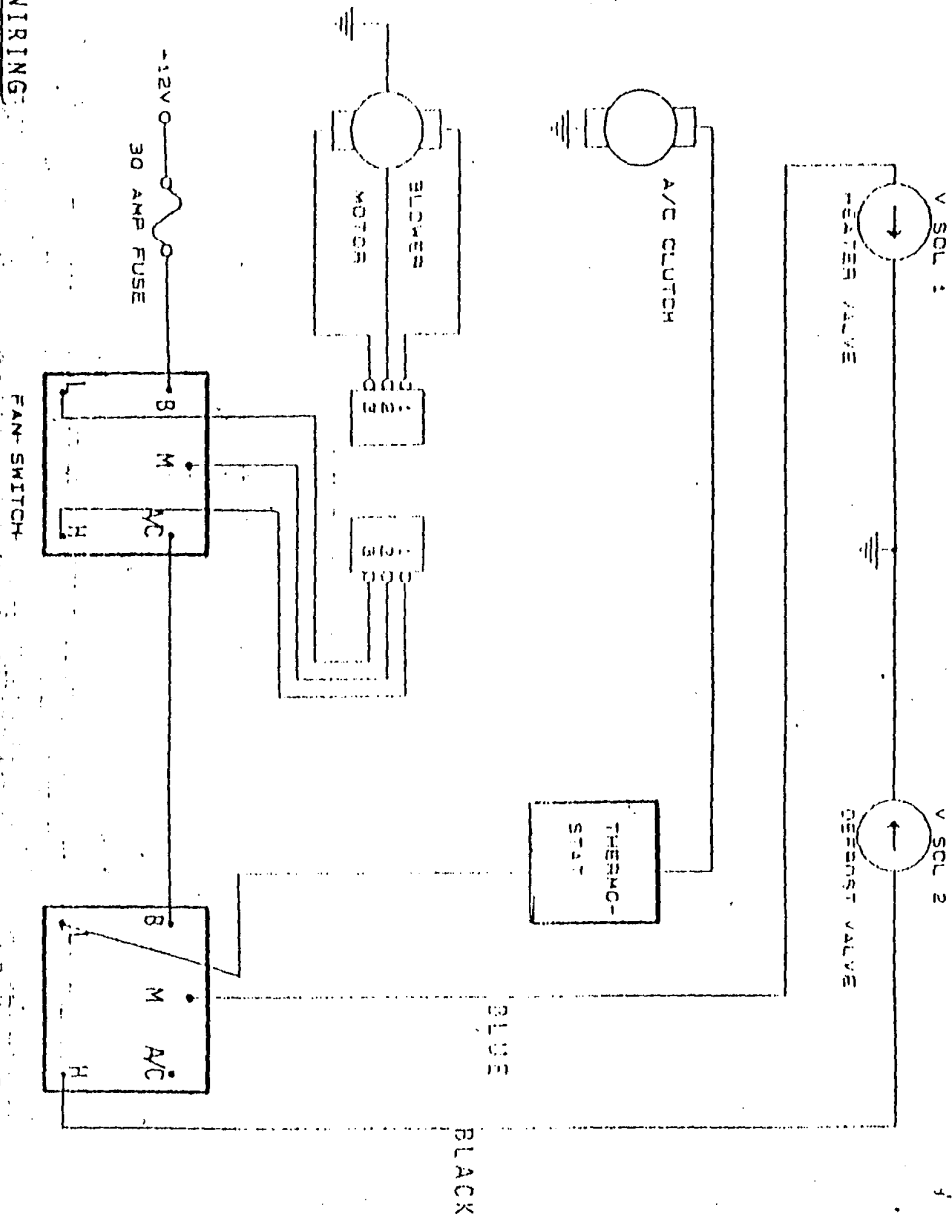

WIRING:

Blue wire with fuse-----	+12 volts-----
long black wire-----	Compressor clutch-----
Short blue wire-----	Vacuum solenoid for water valve-----
*Short black wire-----	Vacuum solenoid for defrost-----
Red-orange-yellow-----	Blower motor harness-----
*Eliminate this wire if the system is not equipped with defrost-----	

WIRING ON BACK of unit (usually blue) - Tied into 2 Terminals - Put 1 side + the other Ground